
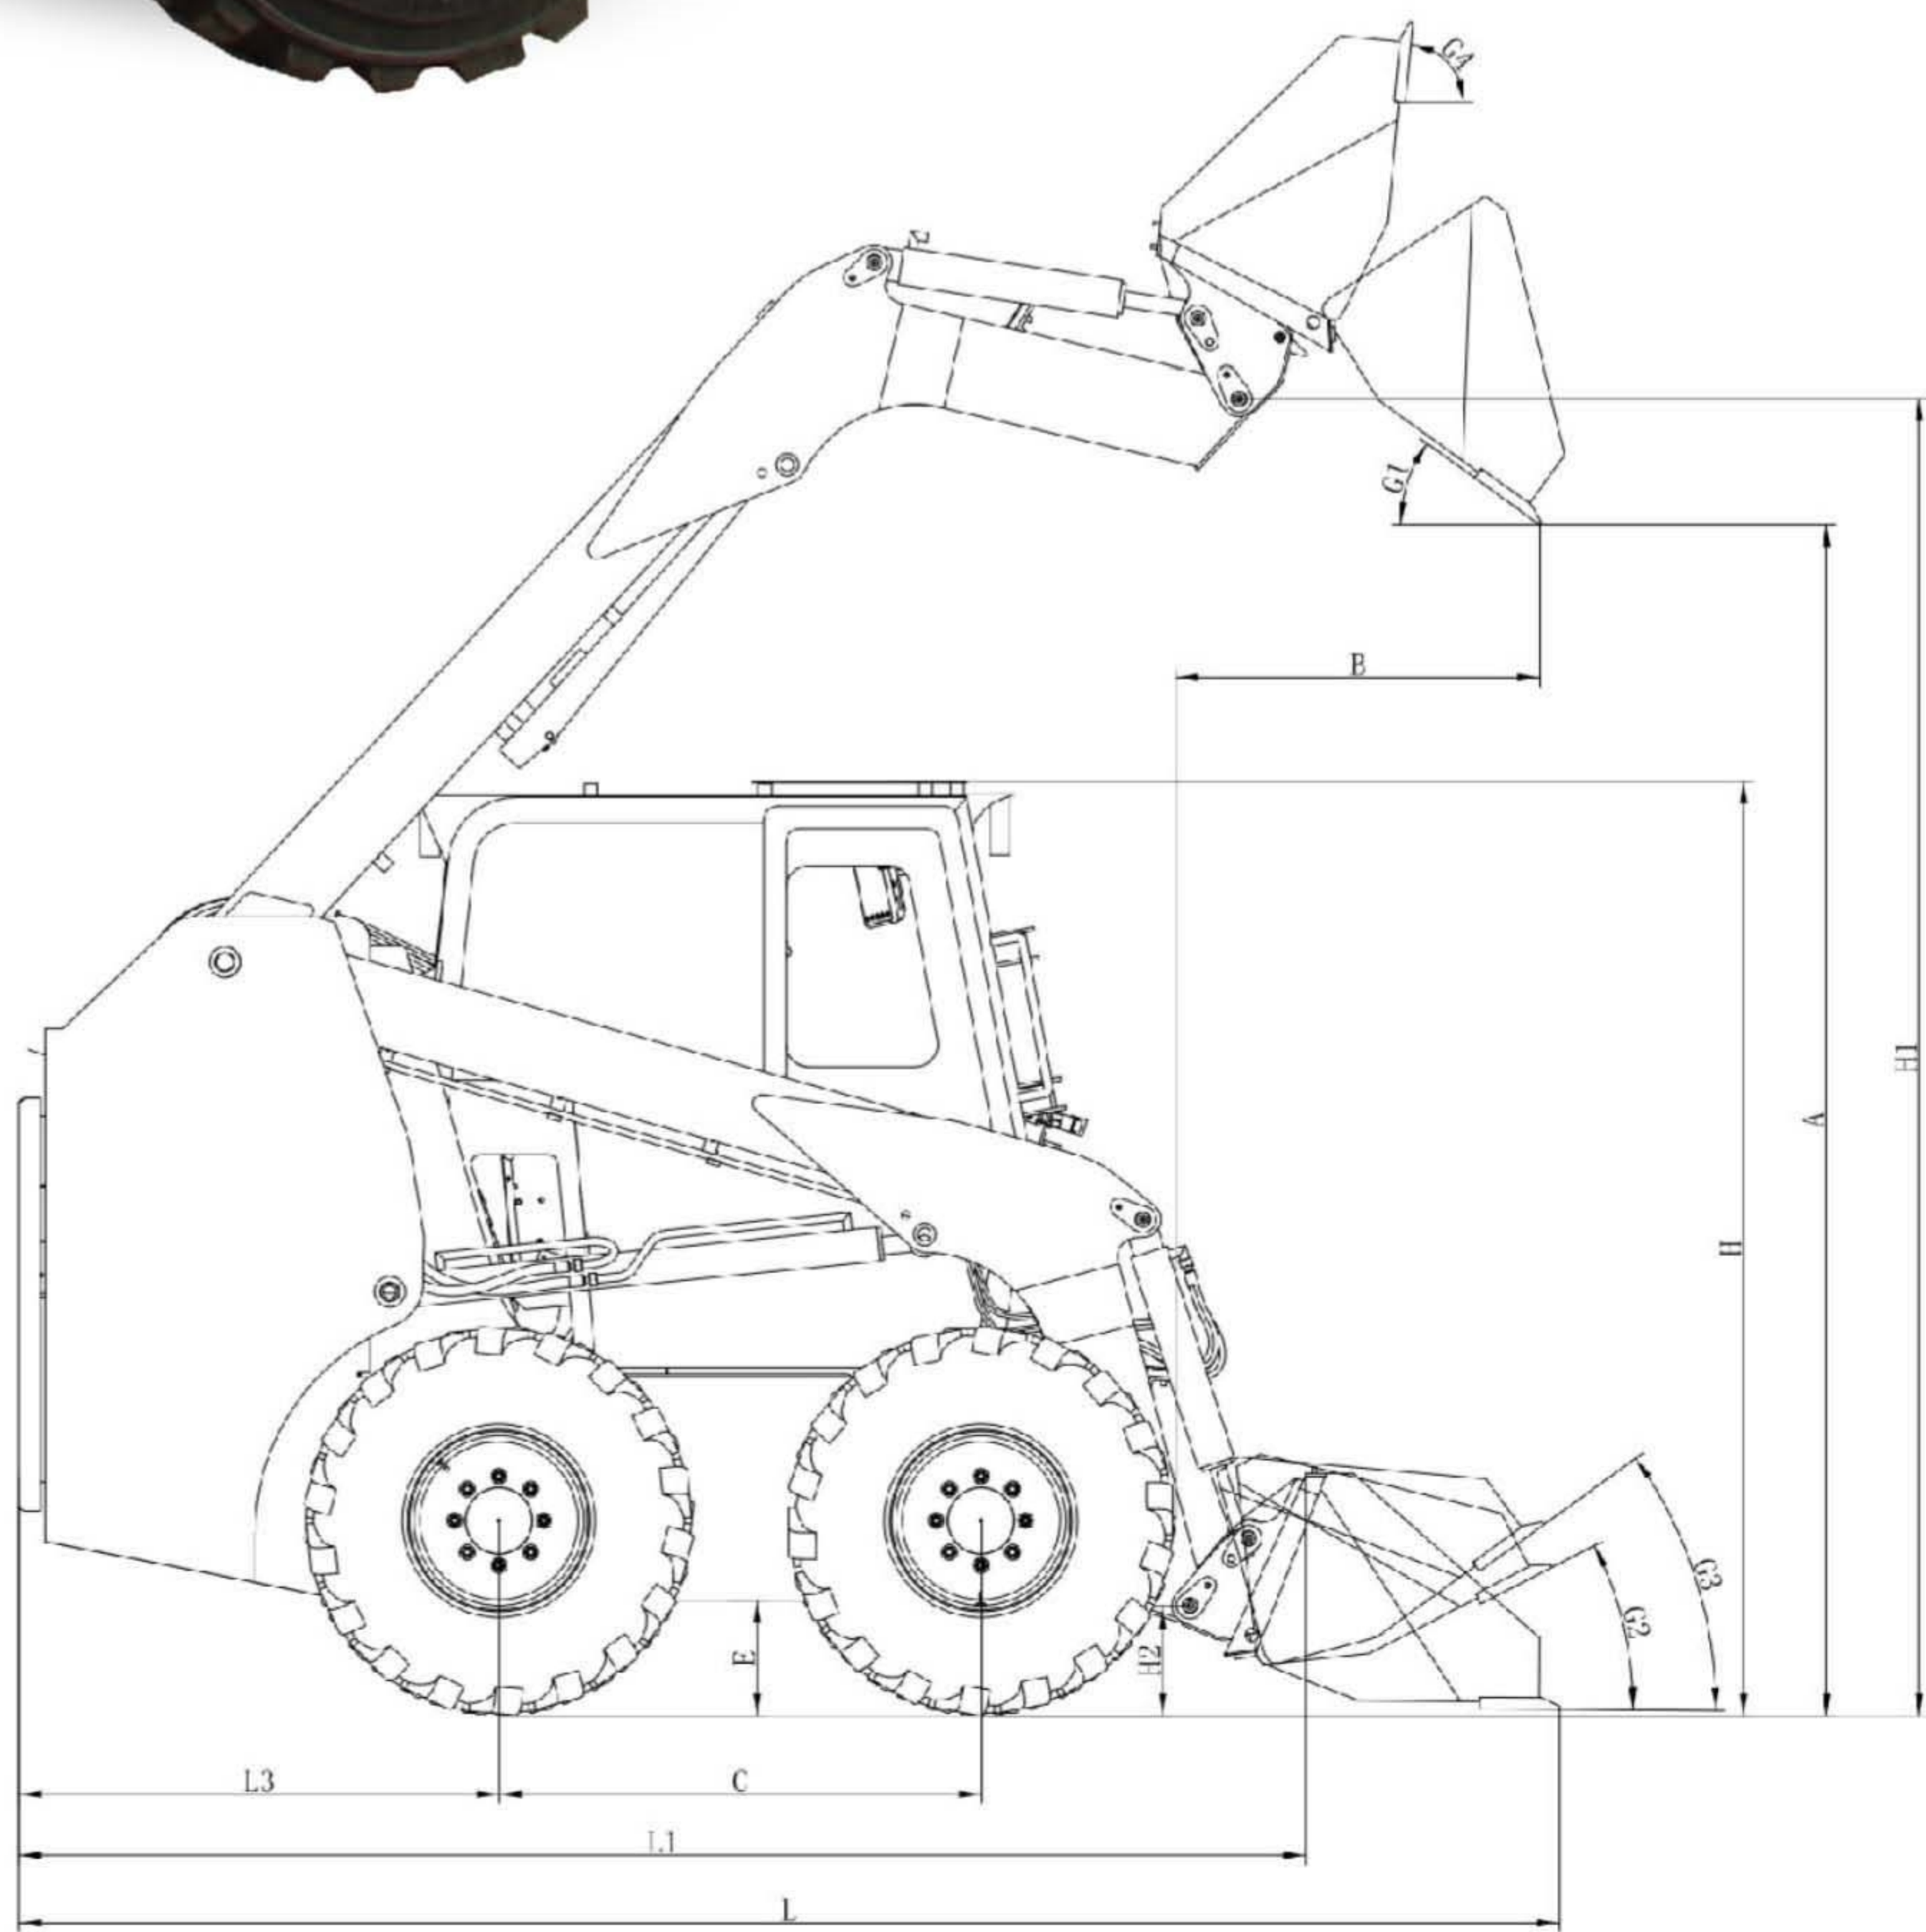


XG3080R

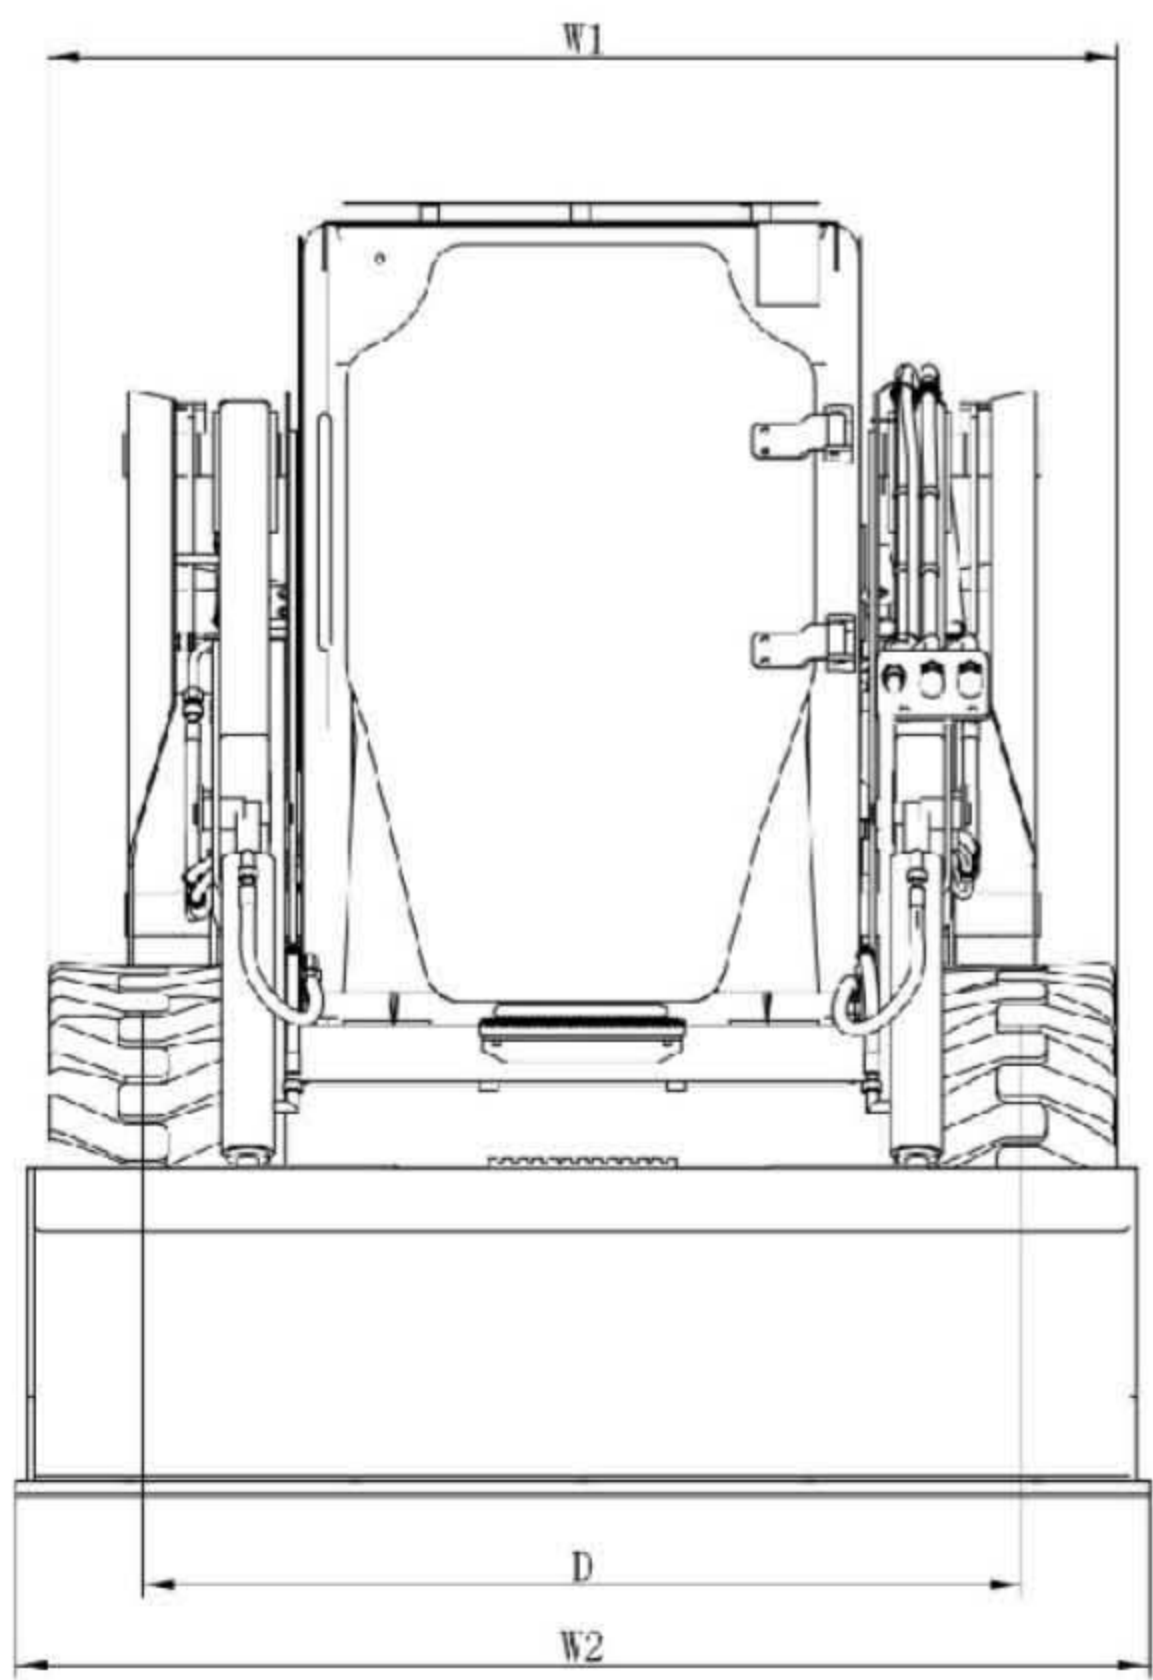

整机技术参数Overall Machine Technical Parameter			
项目 Item		单位Unit	道依茨3140R DEUTZ3140R
额定斗容量Standard bucket capacity		m³	0.54
额定载重量Rated load		kg	1400
整机工作质量Operating weight		kg	3960
卸载高度Dumping height	刀板Cutting edge	mm	2390
	斗齿Bucket teeth	mm	
卸载距离Dumping reach	刀板Cutting edge	mm	615
	斗齿Bucket teeth	mm	
轴距 Wheel base		mm	1080
轮距 Tread		mm	1385
最小离地间隙 Ground clearance		mm	220
整机长度带铲斗Overall length with bucket		mm	3570
整机长度不带铲斗Overall length without bucket		mm	2580
主机宽度Width		mm	1705
铲斗宽度Bucket width		mm	1815
主机最大总高度Total Height		mm	2050
最大提升时卸料角Dumping angle at maximum height		°	40
最大提升时销轴高度Height to hinge pin,fully raised		mm	3090
收斗角Rollback angle	地面位置at ground	°	28
	运料位置at carry position	°	30
	最大提升时fully raised	°	85
运料位置高度Carry position height		mm	240
后悬长度Rear length		mm	1065
转弯半径Turning radius	左Left	mm	1625
	右Right	mm	
铲斗在运料位置时转弯半径 Turning radius with bucket in carry position	左Left	mm	2950
	右Right	mm	
掘起力Breakout force		kn	28
牵引力Drawing force		kn	31
提升时间Lifting time		s	4.1
下降时间Lowering time		s	2.8
卸载时间Dumping time		s	2.5
三项和时间Lifting, dumping and lowering		s	9.4
最大行驶速度Max. Speed		km/h	20